




ImpactBearing.com

LARGEST INVENTORY • IN STOCK OVERNIGHT

(800) 962-4180



Stainless Steel Radial Open And Flanged Open Bearings Metric L Series

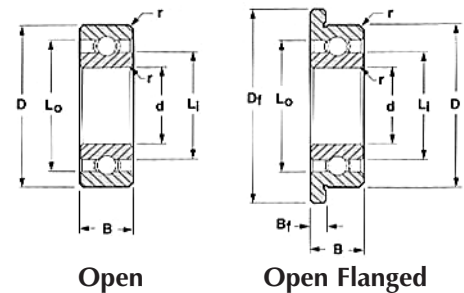

Impact Part Number "Open"	Impact Part Number "Flanged"	BORE d	O.D. D	WIDTH B	FLANGE DIAMETER D _f	FLANGE WIDTH B _f	REFERENCE DIAMETER		FILLET RADIUS r	BALL COMPLEMENT		Load Ratings Kgs.		SPEED RATING N _{max} /n rpm/1000
							L _i	L _o		NO. Z	SIZE D _w	DYN. C _r	STATIC C _{0r}	
SL-310	SLF-310	1.0	3.0	1.0	3.8	0.3	1.60	2.41	0.05	7	0.5	9	3	193
SL-415	SLF-415	1.5	4.0	1.2	5.0	0.4	2.26	3.25	0.05	7	0.635	13	4	140
SL-520	SLF-520	2.0	5.0	1.5	6.1	0.5	2.90	4.04	0.08	7	1/32	19	6	112
SL-625	SLF-625	2.5	6.0	1.8	7.1	0.5	3.80	4.93	0.08	8	1/32	21	8	89
SL-630	SLF-630	3.0	6.0	1.8	7.2	0.6	3.80	4.93	0.08	8	1/32	21	8	89
SL-730	SLF-730	3.0	7.0	2.0	8.1	0.5	4.10	5.83	0.10	7	3/64	40	14	78
SL-740	SLF-740	4.0	7.0	2.0	8.2	0.6	4.80	5.93	0.08	11	1/32	26	11	72
SL-840	SLF-840	4.0	8.0	2.0	9.2	0.6	5.20	6.93	0.10	7	3/64	40	15	64
SL-940	SLF-940	4.0	9.0	2.5	10.3	0.6	5.20	7.48	0.10	7	1/16	66	23	61
SL-1040	SLF-1040	4.0	10.0	3.0	11.2	0.6	5.80	7.96	0.15	8	1/16	73	27	54
SL-850	SLF-850	5.0	8.0	2.0	9.2	0.6	5.80	6.95	0.08	13	1/32	28	14	59
SL-950	SLF-950	5.0	9.0	2.5	10.2	0.6	6.00	7.73	0.10	10	3/64	51	21	56
SL-1050	SLF-1050	5.0	10.0	3.0	11.2	0.6	6.40	8.63	0.10	8	1/16	73	25	52
SL-1150	SLF-1150	5.0	11.0	3.0	12.5	0.8	6.40	8.63	0.15	8	1/16	73	29	48
SL-1060	SLF-1060	6.0	10.0	2.5	11.2	0.8	6.95	8.73	0.10	9	3/64	47	20	49
SL-1260	SLF-1260	6.0	12.0	3.0	13.2	0.6	7.70	9.94	0.15	10	1/16	85	37	43
SL-1360	SLF-1360	6.0	13.0	3.5	15.0	1.0	8.00	10.98	0.15	8	2.0	111	45	41
SL-1170	SLF-1170	7.0	11.0	2.5	12.2	0.6	8.10	9.83	0.10	9	3/64	46	21	43
SL-1370	SLF-1370	7.0	13.0	3.0	14.2	0.6	8.90	11.13	0.15	11	1/16	90	35	39
SL-1470	SLF-1470	7.0	14.0	3.5	16.0	1.0	9.0	12.03	0.15	9	2.0	120	53	37
SL-1280	SLF-1280	8.0	12.0	2.5	13.2	0.6	9.10	10.93	0.10	1	3/64	52	26	39
SL-1480	SLF-1480	8.0	14.0	3.5	15.6	0.8	9.90	12.13	0.15	10	1/16	84	40	35
SL-1680	SLF-1680	8.0	16.0	4.0	18.0	1.0	10.40	13.63	0.20	9	3/32	164	73	32
SL-1790	SLF-1790	9.0	17.0	4.0	19.0	1.0	11.20	14.84	0.20	10	3/32	176	83	30
SL-2090	-	9.0	20.0	6.0	-	-	12.32	16.68	0.30	9	7/64	217	101	27
SL-1910	-	10.0	19.0	5.0	-	-	12.32	16.71	0.30	9	7/64	217	101	27

- "Z" Metal shield one side only
- "2RS" Rubber seal two sides

- "ZZ" Metal shield two sides
- Add "CER" prefix for Ceramic

- "RS" rubber seal one side only
- Delete "S" Prefix for Chrome/Steel

- Available in Chrome/Steel

IMPACT BEARINGS © 2005 All rights reserved.

800-962-4180 || Toll Free Fax: 1-888-8BEARING

1291 Puerta Del Sol || San Clemente, CA 92673

Web: <http://impactbearing.com> || Email: info@impactbearing.com