




ImpactBearing.com

LARGEST INVENTORY • IN STOCK OVERNIGHT

(800) 962-4180



Stainless Steel Radial Shielded And Flanged Shielded Bearings Metric R Series

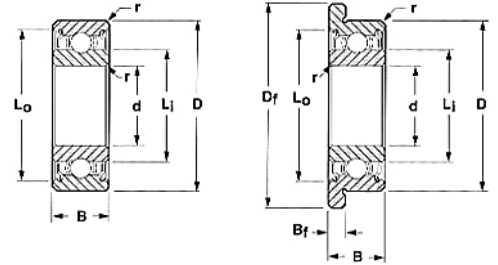

Impact Part Number "Open"	Impact Part Number "Flanged"	BORE d	O.D. D	WIDTH B	FLANGE DIAMETER D _f	FLANGE WIDTH B _f	REFERENCE DIAMETER		FILLET RADIUS r	BALL COMPLEMENT		Load Ratings Kgs.		SPEED RATING N _{max} ^{1/n} rpm/1000
							L _i	L _o		NO. Z	SIZE D _w	DYN. C _r	STATIC C _{0r}	
SR-515	SRF-515	1.5	5.0	2.0	6.3	0.6	2.60	4.03	0.15	7	1/32	19	6	123
SR-615	SRF-615	1.5	6.0	2.5	7.5	0.6	2.90	5.06	0.15	6	3/64	34	10	102
SR-620	SRF-620	2.0	6.0	2.3	7.5	0.6	3.10	5.23	0.15	7	1.0mm	29	9	98
SR-720	SRF-720	2.0	7.0	2.8	8.5	0.7	3.80	5.93	0.15	7	3/64	39	13	83
SR-725	SRF-725	2.5	7.0	2.5	8.5	0.7	3.80	5.93	0.15	7	3/64	39	13	83
SR-825	SRF-825	2.5	8.0	2.8	9.5	0.7	4.10	7.20	0.15	6	1/16	57	18	73
SR-830	SRF-830	3.0	8.0	3.0	9.5	0.7	4.10	7.20	0.15	6	1/16	57	18	73
SR-930	SRF-930	3.0	9.0	3.0	10.5	0.7	4.80	7.64	0.15	7	1/16	65	23	64
SR-1030	SRF-1030	3.0	10.0	4.0	11.5	1.0	5.08	8.20	0.15	7	1/16	66	23	61
SR-1140	SRF-1140	4.0	11.0	4.0	12.5	1.0	6.40	9.54	0.15	8	1/16	73	29	52
SR-1240	SRF-1240	4.0	12.0	4.0	13.5	1.0	5.62	9.99	0.20	7	2.0mm	98	37	48
SR-1340	SRF-1340	4.0	13.0	5.0	15.0	1.0	5.97	11.20	0.20	7	3/32	134	50	44
SR-1640	SRF-1640	4.0	16.0	5.0	18.0	1.0	7.80	13.41	0.30	7	7/64	177	69	37
SR-1350	SRF-1350	5.0	13.0	4.0	15.0	1.0	6.66	11.14	0.20	8	2.0mm	110	43	44
SR-1450	SRF-1450	5.0	14.0	5.0	16.0	1.0	6.88	12.14	0.20	7	3/32	136	52	40
SR-1650	SRF-1650	5.0	16.0	5.0	18.0	1.0	7.80	13.41	0.30	7	7/64	177	69	37
SR-1950	SRF-1950	5.0	19.0	6.0	22.0	1.5	8.67	16.26	0.30	6	5/32	287	109	31
SR-1560	SRF-1560	6.0	15.0	5.0	17.0	1.2	7.80	13.20	0.15	7	7/64	177	69	37
SR-1760	SRF-1760	6.0	17.0	6.0	19.0	1.2	8.22	14.70	0.20	6	3.5mm	231	86	34
SR-1960	SRF-1960	6.0	19.0	6.0	22.0	1.5	8.67	16.26	0.30	6	5/32	287	109	31
SR-1970	-	7.0	19.0	6.0	-	-	9.55	16.24	0.30	7	1/8	229	93	30
SR-2270	SRF-2270	7.0	22.0	7.0	25.0	1.5	10.80	18.89	0.30	7	5/32	337	140	26
SR-2280	SRF-2280	8.0	22.0	7.0	25.0	1.5	10.80	18.89	0.30	7	5/32	337	140	26

- "Z" Metal shield one side only
- "2RS" Rubber seal two sides

- "ZZ" Metal shield two sides
- Add "CER" prefix for Ceramic

- "RS" rubber seal one side only
- Delete "S" Prefix for Chrome/Steel

- Available in Chrome/Steel

IMPACT BEARINGS © 2005 All rights reserved.

800-962-4180 || Toll Free Fax: 1-888-8BEARING

1291 Puerta Del Sol || San Clemente, CA 92673

Web: <http://impactbearing.com> || Email: info@impactbearing.com